

ATC 2MP High Resolution 30x Rolling Shutter Zoom Camera

HZ8630T-LTA

LVDS / HD-SDI / EX-SDI(V1.0/ V2.0/ V2.1) / 3G-SDI(*) / CVBS / TVI / AVI



Features

- 1/2.8" Progressive Scan STARVIS 2 CMOS
- 360x AF Zoom (Optical 30x, Digital 12x)
- 1080p 60/50/30/25fps,
720p 60/50/30/25fps, 1080i 60/50fps
- Mechanical Day&Night
- True WDR
- 2D/3D DNR, Defog, DIS
- UART (VISCA, PELCO-D/P/C)

STARVIS 2

1/2.8"

CMOS

60/50fps
FHD

1080p

30x AF

ZOOM



DNR



MOTION


Rolling
Shutter


Specifications

Image Sensor		1/2.8" Progressive Scan STARVIS 2 CMOS
Effective Pixels		2.12MP 1936(H) x 1100(V)
Video Output Mode	Common	HD-SDI/EX-SDI(V1.0/ V2.0/ V2.1)/3G-SDI(*)/CVBS
	AVI/TVI/LVDS	AVI/TVI/LVDS
Max. Video Resolution		LVDS/HD-SDI/EX-SDI/3G-SDI(*):1080p@60(50fps) AVI/TVI:1080p@30(25fps)
Synchronization system		Internal
Min.Illumination		Day : 0.04Lux(F1.6), Night : 0.01Lux(F1.6/ ICR on) Sens-Up off, AGC64dB
S/N Rate		More than 55dB(AGC off, Sens-Up off)
Lens	Type	AF Optical zoom lens(DC Iris), IR Corrective
	Focal Length	f=4.3mm~129mm
	F-value	F1.6(W)~F5.0(T)
	Angle of View	H 66.9°(W)~2.5°(T), V 39.7°(W)~1.4°(T)
Zoom ratio		Optical 30x / Digital 12x
Focus Min.Working Distance		0.01m(Wide)/1.0m(Tele)~∞
Focus Control		Auto/Interval/One Shot/Manual/Preset
AE Mode		Auto/Iris Priority/Shutter Priority/Manual
Brightness		1~20
Manual Shutter		1/1, 1/2, 1/4(3), 1/8(6), 1/15(12), 1/30(25), 1/60(50)~1/30000
Manual Iris		F1.6~F19, Close
Sense-up		Off~32fields
ETC		Slow AE
D&N Mode		Auto/Color(Day)/B&W(Night)/EXT-H/EXT-L
White Balance		Auto/Indoor/Outdoor/One push/ATW/Manual
Image Freeze		Off/On
Image Flip		Off/Horizontal/Vertical/H+V(180° Flip)
Privacy Mask Zone		8 Zones/14 mask color selectable


(*) 3G-SDI : Supported from firmware v 1.4.2 or later. Operation not guaranteed

Digital Image Stabilization		Off/On
Motion Detection		4 Zones
D-WDR		Off/Low/Middle/High
WDR		Low/Middle/High
BLC		Off/0~10, Area selectable
HLC		Off/0~20, Color selectable
AGC		Max.80dB
Sharpness		Adjustable(0~15)
3D-DNR		Off/Auto(Level:0~2)/ Manual(Gain:0~255/THLD:0~255/FK:0~255)
2D-DNR		Off/Auto(Level:0~2)/ Manual(Gain:0~255/THLD:0~255)
Defog		Off/On(Low/Middle/High)
Position Preset		Non-volatile 192 position(zoom/focus) presets. 16-presets & custom preset
Language		English, Russian, Spanish, German, French, Portuguese, Chinese, Japanese
UART	Remote	+5.0V(option: +3.3V)
	Protocol	VISCA, PELCO-D/P/C: Auto Detection
	Baud rate	2400/4800/9600/19200/38400/57600/115200bps
UTC		TVI-UTC / AVI-UTC
Supply Voltage		12VDC(9V to 15VDC)
Power Consumption		Max.5.2W / Non-working zoom&focus 2.9W
Dimension(mm)		50x58.8x90.5mm
Weight		Approx.233g
Operating Temperature		-10°C~+50°C, Humidity(Less than 90%)
Storage Temperature		-20°C~+60°C, Humidity(Less than 90%)
Remark		


Dimension




Front

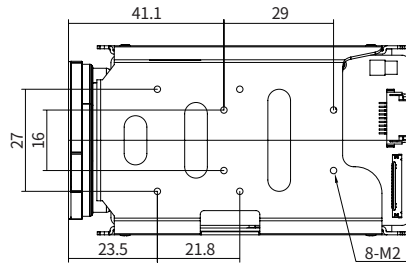


Top

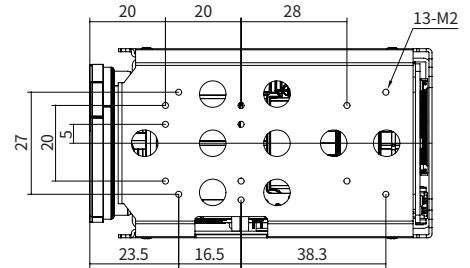


Bottom



Rear

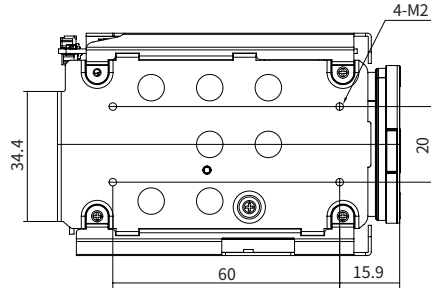


Left

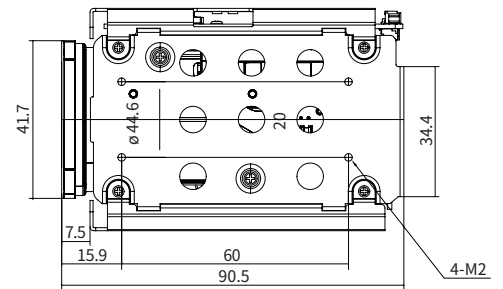

Right

Pin Assignment

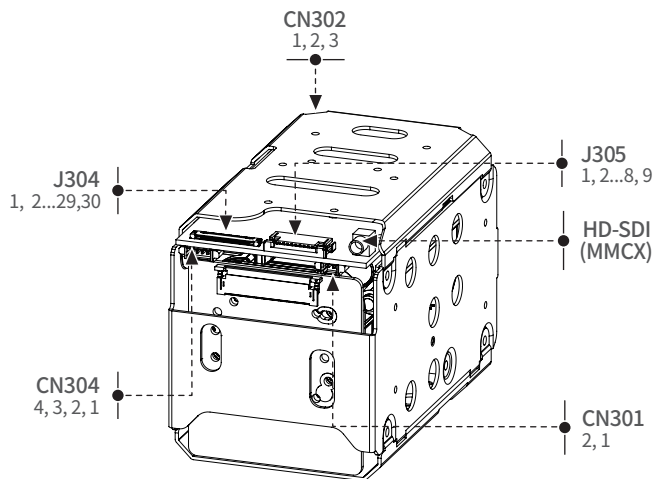

(*1) TXD/RXD

- 5 V : Default level
- 3.3 V : Available on request (factory option)
- RXD input : Accepts both 5 V and 3.3 V signals (tolerant)

Jack	SDI Output connector / MMCX Jack Connector
------	--

Pin no.	CN301(RS485) / Molex 53261-0271
1	TRX+
2	TRX-

Pin no.	CN302(External D&N) / JST: SM03B-SRSS-TB
1	Ext. D&N: External D&N Input
2	GND
3	+3.3V Out(For sensor)

Pin no.	CN304(TVI/AVI) / Molex: 53261-0471
1	POWER IN: +12VDC
2	GND(DC12V)
3	TVI/AVI Output (Select On OSD)
4	GND(TVI/AVI)

Pin no.	J305(TVI/AVI)/ Molex: 52207-0985
1	Default GND (Optional: RS485_EN or AD key)
2	TVI/AVI Output (Select On OSD)
3	GND
4	CVBS Output
5	GND
6	+12VDC
7	GND
8	TXD(*1) : 5.0V(option 3.3V)
9	RXD(*1) : 5.0V(option 3.3V)

Pin no.	J304(Micro Co-Axial) / KEL Co.USL00-30L-A
1	TX_OUT3+
2	TX_OUT3-
3	TX_CLKOUT+
4	TX_CLKOUT-
5	TX_OUT2+
6	TX_OUT2-
7	TX_OUT1+
8	TX_OUT1-
9	TX_OUT0+
10	TX_OUT0-
11	GND
12	TXD(*1) : 5.0V(option 3.3V)
13	RXD(*1) : 5.0V(option 3.3V)
14	+12VDC
15	+12VDC
16	+12VDC
17	+12VDC
18	+12VDC
19	GND
20	GND
21	TX_OUT7+ : Single out mode (open)
22	TX_OUT7- : Single out mode(open)
23	TX_OUT6+ : Single out mode(open)
24	TX_OUT6- :Single out mode(open)
25	CVBS Output
26	RESET_IN : Reset - Low (GND), Normal(1.8V)
27	TX_OUT5+ : Single out mode (open)
28	TX_OUT5- : Single out mode (open)
29	TX_OUT4+ : Single out mode (open)
30	TX_OUT4- : Single out mode (open)